





T8 / TCL 2-36W BZMP



Urms (V)	Irms (A)	P (W)	PF	Freq (Hz)			
228.3	0.257	58.3	0.994	50.02			
		spectrum	voltage	current	spectrum	voltage	current
		k	%	%	k	%	%
		0	0.0	0.0	1	100.0	100.0
		2	0.0	0.2	3	1.1	5.1
		4	0.0	0.1	5	0.6	1.1
		6	0.0	0.2	7	0.7	3.4
		8	0.0	0.1	9	0.0	0.7
		10	0.0	0.3	11	0.2	2.4
		12	0.0	0.2	13	0.1	0.5
		14	0.0	0.1	15	0.1	2.0
		16	0.0	0.3	17	0.0	0.5
		18	0.0	0.3	19	0.0	1.1
		20	0.0	0.1	21	0.0	0.6
		22	0.0	0.1	23	0.1	0.4
		24	0.0	0.3	25	0.0	0.7
		26	0.0	0.2	27	0.0	0.2
		28	0.0	0.0	29	0.0	0.1
		30	0.0	0.3	31	0.0	0.3
		32	0.0	0.3	33	0.0	0.0
		34	0.0	0.1	35	0.0	0.4
		36	0.0	0.1	37	0.0	0.1
		38	0.0	0.2	39	0.0	0.2

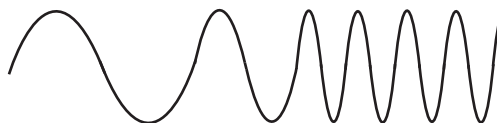


T8 / TCL 2-36W BZMP




Irms (A)	PF	THDI (%)	Begin Phase (°)	Peak Phase (°)	End Phase (°)
0.257	0.993	7.5	6	82	174

	spectrum k	current (A)	mA/W	spectrum k	current (A)	mA/W
	0	0.000	0.0	1	0.256	4.4
	2	0.000	0.0	3	0.013	0.2
	4	0.000	0.0	5	0.002	0.0
	6	0.000	0.0	7	0.010	0.2
	8	0.000	0.0	9	0.002	0.0
	10	0.000	0.0	11	0.006	0.1
	12	0.000	0.0	13	0.000	0.0
	14	0.000	0.0	15	0.005	0.1
	16	0.000	0.0	17	0.002	0.0
	18	0.000	0.0	19	0.002	0.0
	20	0.001	0.0	21	0.001	0.0
	22	0.000	0.0	23	0.001	0.0
	24	0.000	0.0	25	0.001	0.0
	26	0.000	0.0	27	0.000	0.0
	28	0.000	0.0	29	0.001	0.0
	30	0.000	0.0	31	0.001	0.0
	32	0.000	0.0	33	0.001	0.0
	34	0.000	0.0	35	0.002	0.0
36	0.000	0.0	37	0.000	0.0	
38	0.000	0.0	39	0.000	0.0	


spectrum k	current %
2	0.0
3	5.3
5	0.7
7	3.8
9	0.9
11	2.5

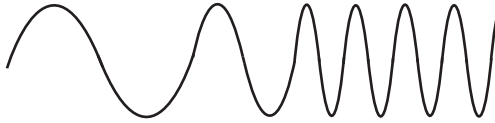


T8 / TCL 2-36W BZMP





	<p>Lamp Voltage:</p> <p>Vrms: 106.6 (V)</p> <p>Vm: 167.4 (V)</p> <p>Vcf: 1.57</p>
	<p>Lamp Current RMS: 0.261 (A)</p> <p>I_{lm}: 0.444 (A)</p> <p>I_{lcf}: 1.71 -1.72</p> <p>I_{ldhc}: 0.9 %</p>
	<p>Filament Current:</p> <p>I_{frms}: 0.222 (A)</p> <p>I_{fm}: 0.406 (A)</p> <p>I_{fcf}: 1.83</p>
	<p>Current Lead to Cathode:</p> <p>I_{krms}: 0.346 (A)</p> <p>I_{km}: 0.528 (A)</p> <p>I_{kcf}: 1.53</p>
<p>P_{out}: 25.8 (W) f : 30.58 (kHz)</p>	

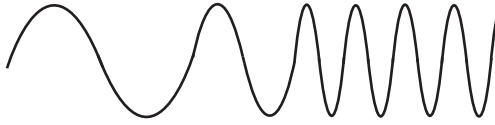

T8 / TCL 2-36W BZMP



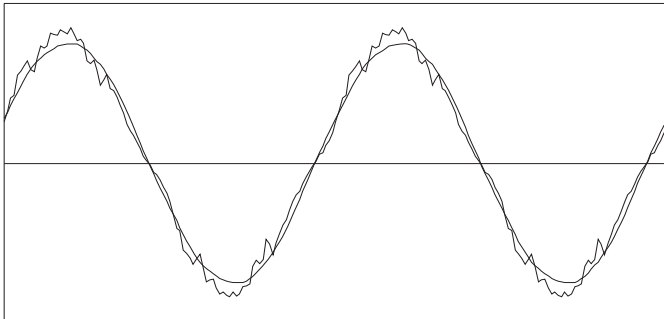Input Characteristic		Luminous flux: lm		Color Temperature: K			
			Urms (V)	228.4	Irms (A)	0.255	Irmsw (A)
Output Characteristic	Lamp Voltage	P (W)	57.7	PF	0.993	PFw	0.826
		Freq (Hz)	50.00	CFv	1.41	CFi	1.56
	Lamp Current	THDU		THDI		THDIw	
		1.6%(IEC)		7.6%(IEC)		67.3%(IEC)	
		Vrms	Irms	spectrum	Voltage	Current	
Lamp Voltage	105.7 (V)	0.261 (A)	k	%	%		
	Ifrms	Ikrms	1	100.0	100.0		
Lamp Current	0.220 (A)	0.345 (A)	3	1.2	5.4		
	Pout	f	5	0.6	0.8		
Lamp Current	25.6 (W)	30.52 (kHz)	7	0.8	3.9		
	Ilm	Ilcf	9	0.1	0.8		
Lamp Current	0.446 (A)	1.70	11	0.1	2.5		

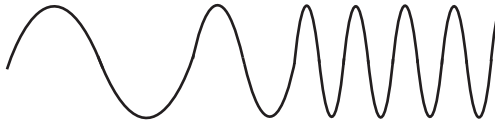

T8 / TCL 2-36W BZMP

