




T5 3-24W BP



Urms (V)	Irms (A)	P (W)	PF	Freq (Hz)			
229.3	0.545	70.9	0.567	50.06			
		spectrum	voltage	current	spectrum	voltage	current
		k	%	%	k	%	%
		0	0.0	0.0	1	100.0	100.0
		2	0.0	0.2	3	1.6	87.0
		4	0.0	0.2	5	0.2	65.8
		6	0.0	0.3	7	0.7	44.3
		8	0.0	0.3	9	0.2	30.8
		10	0.0	0.3	11	0.2	26.2
		12	0.0	0.4	13	0.3	22.8
		14	0.0	0.4	15	0.1	17.5
		16	0.0	0.4	17	0.2	13.2
		18	0.0	0.2	19	0.1	12.3
		20	0.0	0.1	21	0.1	11.4
		22	0.0	0.2	23	0.2	8.3
		24	0.0	0.2	25	0.1	3.9
		26	0.0	0.3	27	0.0	2.9
		28	0.0	0.3	29	0.1	5.0
		30	0.0	0.4	31	0.0	5.5
		32	0.0	0.5	33	0.0	4.8
		34	0.0	0.6	35	0.1	4.3
		36	0.0	0.5	37	0.1	4.0
		38	0.0	0.5	39	0.0	3.1

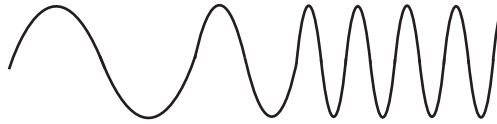


T5 3-24W BP




Irms (A)	PF	THDI (%)	Begin Phase (°)	Peak Phase (°)	End Phase (°)
0.544	0.566	130.5	56	63	103

		spectrum	current	mA/W	spectrum	current	mA/W
		k	(A)		k	(A)	
		0	0.000	0.0	1	0.331	4.7
		2	0.000	0.0	3	0.288	4.1
		4	0.001	0.0	5	0.218	3.1
		6	0.001	0.0	7	0.147	2.1
		8	0.001	0.0	9	0.103	1.5
		10	0.001	0.0	11	0.088	1.2
		12	0.001	0.0	13	0.076	1.1
		14	0.001	0.0	15	0.058	0.8
		16	0.001	0.0	17	0.043	0.6
		18	0.001	0.0	19	0.040	0.6
		20	0.001	0.0	21	0.037	0.5
		22	0.001	0.0	23	0.027	0.4
		24	0.001	0.0	25	0.012	0.2
		26	0.001	0.0	27	0.009	0.1
		28	0.001	0.0	29	0.016	0.2
		30	0.001	0.0	31	0.018	0.3
		32	0.002	0.0	33	0.016	0.2
		34	0.001	0.0	35	0.014	0.2
		36	0.001	0.0	37	0.013	0.2
		38	0.001	0.0	39	0.010	0.1


spectrum	current
k	%
2	0.1
3	87.0
5	65.8
7	44.4
9	31.0
11	26.5

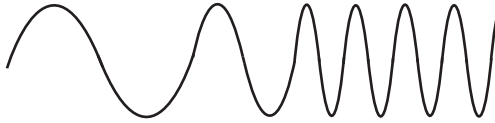

T5 3-24W BP




	<p>Lamp Voltage:</p> <p>Vrms: 78.9 (V)</p> <p>Vm: 121.9 (V)</p> <p>Vcf: 1.54</p>
	<p>Lamp Current RMS: 0.292 (A)</p> <p>I_{lm}: 0.458 (A)</p> <p>I_{lcf}: 1.57 -1.56</p> <p>I_{ldhc}: 0.5 %</p>
	<p>Filament Current:</p> <p>I_{frms}: 0.128 (A)</p> <p>I_{fm}: 0.222 (A)</p> <p>I_{fcf}: 1.73</p>
	<p>Current Lead to Cathode:</p> <p>I_{krms}: 0.320 (A)</p> <p>I_{km}: 0.516 (A)</p> <p>I_{kcf}: 1.61</p>
<p>P_{out}: 22.4 (W) f : 36.50 (kHz)</p>	

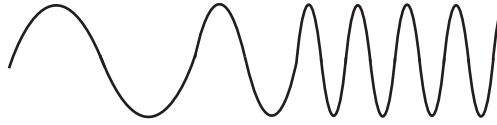



T5 3-24W BP




Input		Luminous flux: lm		Color Temperature: K							
		Characteristic 	Urms (V)	229.2	Irms (A)	0.546	Irmw (A)	0.546			
P (W)	70.7		PF	0.565	PFw	0.565					
Freq (Hz)	50.03		CFv	1.41	CFi	3.44					
THDU			THDI		THDIw						
1.8%(IEC)		131.0%(IEC)		131.0%(IEC)							
Output Characteristic		Vrms		Iirms		spectrum		Voltage		Current	
		78.9 (V)		0.292 (A)		k		%		%	
Lamp Voltage	Iirms		Ikrms		1		100.0		100.0		
	0.128 (A)		0.320 (A)		3		1.6		87.2		
Lamp Current	Pout		f		5		0.2		66.2		
	22.4 (W)		36.52 (kHz)		7		0.7		44.7		
IIm		Iicf		9		0.2		31.0			
0.458 (A)		1.57		11		0.3		26.2			

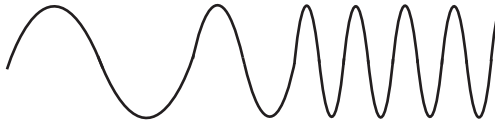

T5 3-24W BP

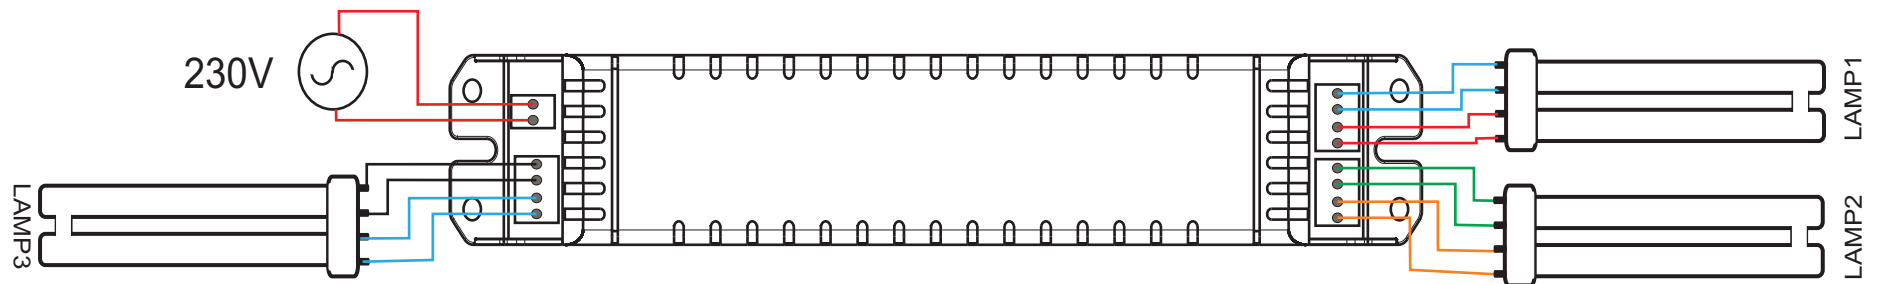

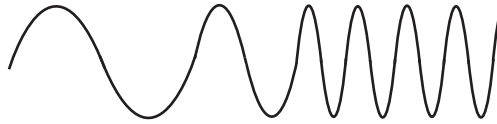

T5 3-24W BP

